


TURNKEY SOLUTIONS FOR END-TO-END EFFICIENCY

By introducing Point of use accessories, AIRnet now provides a complete compressed air distribution solution from start to finish.

These accessories are specifically introduced

- to ensure the highest efficiency of your distribution network
- to protect your downstream equipment
- to complement the performance of your compressed air equipment

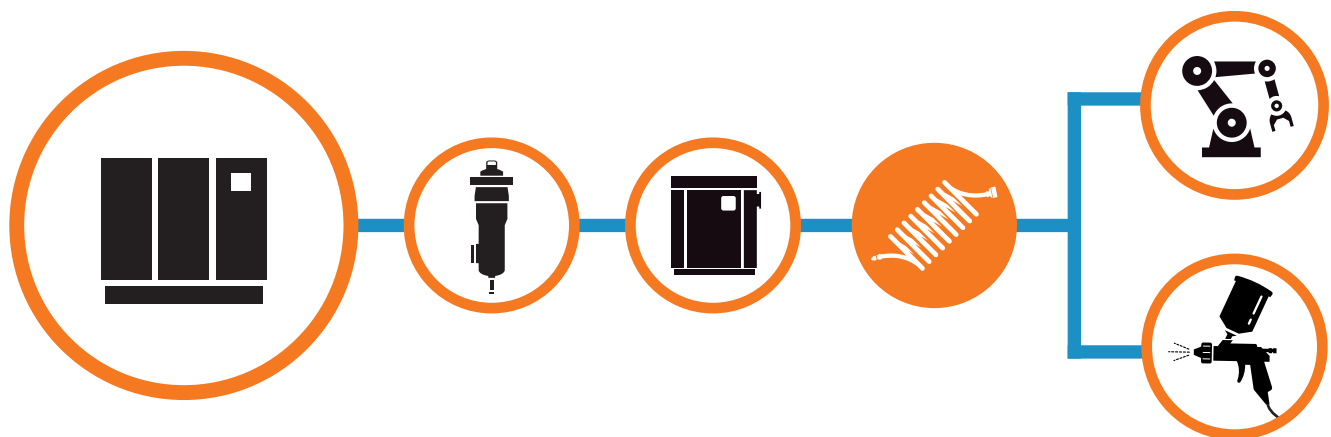

CUSTOMER BENEFITS

- Designed & manufactured in accordance with the highest standards
- One stop solution for your entire compressed air system
- Relevant certificates & approvals
- Available ex-stock

ACCESSORIES OVERVIEW



HOSE REEL - ENCLOSED TYPE

Composite casting or steel casing , retractable hose reel with two variants of hose 10M & 12M Hose Length.

| | |
|-------------------------------------|-----------------------------|
| MOC of Hose | PU Braided |
| Operating pressure | 15 Bar / 220 PSI |
| Temperature | 0°C to 60°C / 32°F to 140°F |
| Connection inlet | 12,5MM / ½" BSP Male |
| Connection Distribution Hose | 12,5MM / ½" BSP Male |

** NPT adaptors are available for the full range



AUTOMATIC DRAINS

Automatic condensate discharger

| | |
|---------------------------|--|
| MOC | Aluminium die cast body & polycarbonate bowl |
| Operating pressure | 0,5 to 10 Bar / 7,25 to 145 PSI |
| Max inlet pressure | 12 Bar / 174 PSI |
| Temperature | -10°C to 60°C / 14°F to 140°F |
| Inlet size | 20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |



REGULATORS

Pressure regulators with aluminium die cast body

| | |
|---------------------------|--|
| Operating pressure | 0,5 to 10 Bar / 7,25 to 145 PSI |
| Max inlet pressure | 12 Bar / 174 PSI |
| Temperature | -10°C to 60°C / 14°F to 140°F |
| Inlet size | 20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Outlet size | 20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Pressure Settings | 0,5 to 10 Bar |



PNEUMATIC AIR GUN

Pneumatic air blow gun with metal body

| | |
|---------------------------|----------------------------|
| Operating pressure | 0 to 15 Bar / 0 to 217 PSI |
| Max inlet pressure | 15 Bar / 217 PSI |
| Air consumption | 100 to 353 l/min |
| Inlet size | ¼" Threaded BSP + NPT |



UNIVERSAL QUICK RELEASE COUPLINGS

CS chrome plated or brass couplers

| | |
|------------------------------|------------------------------|
| Sizes | 1/4", 3/8", 1/2", 1" |
| Operating pressure | 0 to 16 Bar / 0 to 232 PSI |
| Operating temperature | -15°C to 80°C / 5°F to 176°F |
| Inlet size | 1/4" & 3/8" Female Thread |



FILTER & REGULATOR (FR)

Filter + regulator combination to remove water & particle

| | |
|---------------------------------|--|
| MOC | Aluminium die cast body & polycarbonate bowl |
| Inlet size | 20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Outlet size | 20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Operating pressure range | 0 to 10 Bar / 0 to 217 PSI |
| Proof pressure | 15 Bar / 217 PSI |
| Temperature | -10°C to 60°C / 14°F to 140°F |



FILTER & REGULATOR & LUBRICATOR (FRL)

Filter + regulator + lubricator combination to remove water & particle and to provide good lubrication for POU machines & accessories

| | |
|---------------------------------|--|
| MOC | Aluminium die cast body & polycarbonate bowl |
| Inlet size | 20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Outlet size | 20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads |
| Operating pressure range | 0 to 10 Bar / 0 to 217 PSI |
| Proof pressure | 15 Bar / 217,5 PSI |
| Temperature | -10°C to 60°C / 14°F to 140°F |
| Max Flow 3/4" | 7940 L/Min |
| Max Flow 1" | 8200 L/Min |
| Filtration : | 5 Microns |



SPIRAL HOSES

Polyurethane hose with 2 straight ends swivelling connection

| | |
|---------------------------------|---------------------------------|
| Tube material | Polyurethane |
| Operating pressure range | 0,5 to 15 Bar / 7,25 to 217 PSI |
| Temperature | -40°C to 60°C / 7°F to 140°F |
| Hose outside diameter | 16x10MM |
| Hose length | 5M & 10M |
| Connection | Universal quick couplers |



FLEXIBLE RUBBER HOSE (ROLLS)

Oil resistant reinforced rubber hose

| | |
|---------------------------------|-------------------------------|
| Operating pressure range | 20 Bar / 290 PSI |
| Temperature | -25°C to 80°C / 14°F to 140°F |
| Available diameters | 12x8MM |



PU HOSE

High resistant polyurethane hoses

| | |
|---------------------------------|-------------------------------|
| Operating pressure range | 20 Bar / 290 PSI |
| Temperature | -15°C to 60°C / 14°F to 140°F |
| Available diameters | 12MM, 16MM |

Your Dealer