


## TURNKEY SOLUTIONS FOR END-TO-END EFFICIENCY

By introducing Point of use accessories, AIRnet now provides a complete compressed air distribution solution from start to finish.

### These accessories are specifically introduced

- to ensure the highest efficiency of your distribution network
- to protect your downstream equipment
- to complement the performance of your compressed air equipment

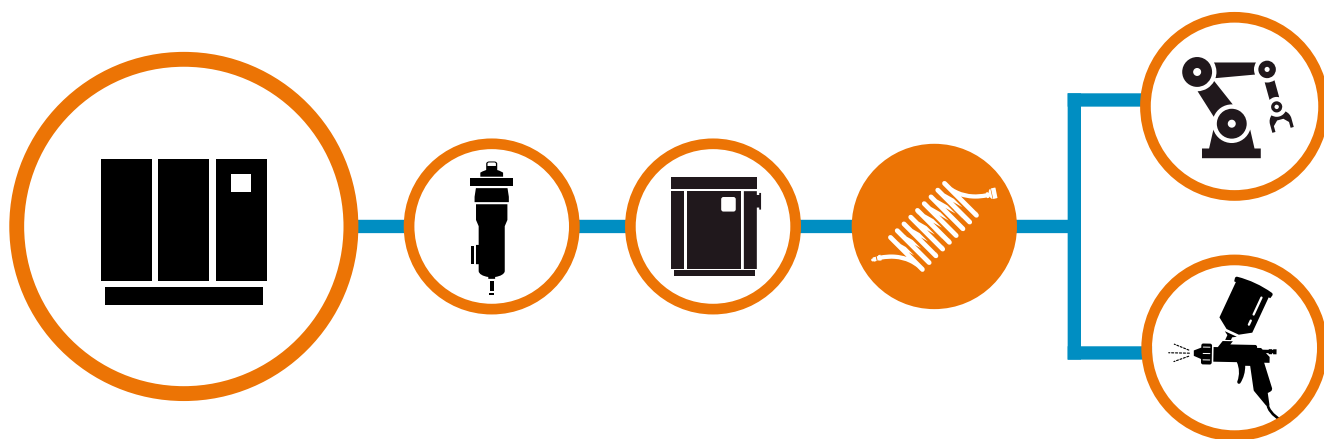

## CUSTOMER BENEFITS

- Designed & manufactured in accordance with the highest standards
- One stop solution for your entire compressed air system
- Relevant certificates & approvals
- Available ex-stock

## ACCESSORIES OVERVIEW



### HOSE REEL - ENCLOSED TYPE

Steel casing retractable hose reel with 12M hose.

<b>MOC of Hose</b>	PU Braided
<b>Operating pressure</b>	10 Bar / 145 PSI
<b>Temperature</b>	0°C to 60°C / 32°F to 140°F
<b>Connection inlet</b>	12,5MM / ½" BSP Male
<b>Connection Distribution Hose</b>	12,5MM / ½" BSP Male

\*\* NPT adaptors are available for the full range



### AUTOMATIC DRAINS

Automatic condensate discharger

<b>MOC</b>	Aluminum body & polycarbonate bowl
<b>Operating pressure</b>	0,5 to 10 Bar / 7,25 to 145 PSI
<b>Max inlet pressure</b>	12 Bar / 174 PSI
<b>Temperature</b>	-10°C to 60°C / 14°F to 140°F
<b>Inlet size</b>	20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads



### REGULATORS

Pressure regulator with Aluminum body

<b>Operating pressure</b>	0,5 to 10 Bar / 7,25 to 145 PSI
<b>Max inlet pressure</b>	12 Bar / 174 PSI
<b>Temperature</b>	-10°C to 60°C / 14°F to 140°F
<b>Inlet size</b>	20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Outlet size</b>	20MM / ¾" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Pressure Settings</b>	0,5 to 10 Bar



### PNEUMATIC AIR GUN

Pneumatic air blow gun with metal body

<b>Operating pressure</b>	0 to 15 Bar / 0 to 217 PSI
<b>Max inlet pressure</b>	15 Bar / 217 PSI
<b>Air consumption</b>	100 to 353 l/min
<b>Inlet size</b>	¼" ISO 228



## UNIVERSAL QUICK RELEASE COUPLINGS

CS chrome plated or brass couplers

<b>Sizes</b>	1/4", 3/8", 1/2", 1"
<b>Operating pressure</b>	0 to 16 Bar / 0 to 232 PSI
<b>Operating temperature</b>	-15°C to 80°C / 5°F to 176°F
<b>Inlet size</b>	1/4" & 3/8" Female Thread



## FILTER & REGULATOR (FR)

Filter + regulator combination to remove water & particle

<b>MOC</b>	Aluminum body & polycarbonate bowl
<b>Inlet size</b>	20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Outlet size</b>	20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Operating pressure range</b>	0 to 10 Bar / 0 to 217 PSI
<b>Proof pressure</b>	15 Bar / 217 PSI
<b>Temperature</b>	-10°C to 60°C / 14°F to 140°F



## FILTER & REGULATOR & LUBRICATOR (FRL)

Filter + regulator + lubricator combination to remove water & particle and to provide good lubrication for POU machines & accessories

<b>MOC</b>	Aluminum body & polycarbonate bowl
<b>Inlet size</b>	20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Outlet size</b>	20MM / 3/4" BSP / NPT - Female threads 25MM / 1" BSP / NPT - Female threads
<b>Operating pressure range</b>	0 to 10 Bar / 0 to 217 PSI
<b>Proof pressure</b>	15 Bar / 217,5 PSI
<b>Temperature</b>	-10°C to 60°C / 14°F to 140°F
<b>Max Flow 3/4"</b>	7940 L/Min
<b>Max Flow 1"</b>	8200 L/Min
<b>Filtration</b>	5 Microns



## SPIRAL HOSES

Polyurethane hose with 2 straight ends swivelling connection

<b>Tube material</b>	Polyurethane
<b>Operating pressure range</b>	0,5 to 15 Bar / 7,25 to 217 PSi
<b>Temperature</b>	-40°C to 60°C / 7°F to 140°F
<b>Hose outside diameter</b>	16x10MM
<b>Hose lenght</b>	5M & 10M
<b>Connection</b>	Universal quick couplers



## FLEXIBLE RUBBER HOSE (ROLLS)

Oil resistant reinforced rubber hose, available in rolls of 25 , 50 & 100 Mts

<b>Operating pressure range</b>	20 Bar / 290 PSi
<b>Temperature</b>	-25°C to 80°C / 14°F to 140°F
<b>Available diameters</b>	17 x 8 MM



## PU HOSE

High resistant polyurethane hoses, available in rolls of 25 , 50 & 100 Mts

<b>Operating pressure range</b>	20 Bar / 290 PSi
<b>Temperature</b>	-15°C to 60°C / 14°F to 140°F
<b>Available diameters</b>	12 x 8 MM

## Your Dealer