

HIGH PERFORMANCE COMPONENTS MAKE FOR CSM 60-100 AND DRD 60-100 SERIES



Reliability

- » Designed with 75 years industry experience
- Careful qualification of components
- » Continuous endurance testing



Safety

- » Emergency stop
- » Protection grid
- Internal and external protection for the electric fan

Quality assurance

- High capacity oil/air coolers, perfect air filtration and cooling guarantee less thermal shocks and a longer life
- » ISO9001,ISO14001 quality assurance
- » OHSAS 18001 quality assurance
- » End to end quality testing procedure

Easy installation and service

- » Plug and play design
- » No special foundation needed
- Easy access to all service components
- » Minimum downtime at service intervention







Air cooler & oil cooler

Separate oil and air cooler for high-quality cooling. Perfect work at 46° C ambient temperature





ES4000T controller

Easy-to-use, graphical touchscreen display with integrated connectivity to optimize and save energy.





Ceccato's in-house designed element

Guarantee the quality of compressed air and efficient operation





High efficiency air filter

Low pressure drop, less noise and 99.9% removal efficiency at 3µm solid particles







Integrated fan

Start/stop coordinated by controller in accordance with the oil temperature

PRODUCT FEATURES AND OPTIONS



>>> Technical data

Model	0		H i i)		=		II)			M
	Pressure		Motor		Capa	icity*	Noise	Weight	Connection	Dimension
	Mpa	psig	kW	hp	I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
	0.7	100		60	128	271	72	866	1 1/2	1723x980x1600
CSM60	0.8	115	45		128	271				
CSIVIOU	1.0	145	40		117	249				
	1.25	180			98	208				
	0.7	100	55	75	164	348	76	1221	2	1950x1090x1600
CSM75	0.8	115			155	328				
CSIVI75	1.0	145			142	301				
	1.25	180			122	258				
	0.7	100	75		218	461	77	1285	2	1950x1090x1600
CSM100	0.8	115		100	211	446				
	1.0	145			185	393				
	1.25	180			153	325				

Model	3		H -		=		•••	2		М
	Pressure		Motor		Capacity*		Noise	Weight	Connection	Dimension
	Mpa	psig	kW	hp	I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
DRD60	0.7	100		60	134	283	70	906	1 1/2	1723x980x1600
	0.8	115	45		133	282				
	1.0	145	45		115	244				
	1.25	180			98	207				
	0.7	100	55	75	180	381	74	1460	2	2259x1060x1594
DRD75	0.8	115			173	366				
טאט/ס	1.0	145			146	309				
	1.25	180			131	278				
DRD100	0.7	100	75	100	236	501	75	1535	2	2259x1060x1594
	0.8	115			230	486				
	1.0	145			204	433	/5			
	1.25	180			170	359				

^{*} Unit performance measured according to ISO 1217. Annex C. latest edition and ISO 2151.

>>> Pioneering components make for a revolutionary range



Filtration panel



Air filter



Screw element



Controller



Oil-separator vessel

Air cooler & oil cooler



Oil filter







VARIABLE SPEED SERIES: CSMV 60-100, DRD 60-100 PM

Concerning to the factory life-cycle cost, the minimal operation cost can really benefit customer investment. Designed for frequently commissioning at load and unload condition, Ceccato DRD PM air compressor meets the minimum power consumption to throughout the long-term commissioning and it can cut your energy bill by up to 35%. DRD PM offer you:



ES4000T controller

- Remotely connect to your compressor anywhere, at any given moment
- Maximize productivity by eliminating the risk of downtime
- Increase reliability through planned service interventions
- Reports suggest cost optimizations



Imperium inverter

In-house designed Imperium inverter ensures perfect match between air demand and air supply





Drive train

Unique design, reliable and high efficiency drive train contribute to reduce energy loss and operation cost.

RELIABLE AND HIGH EFFICIENCY DRIVE TRAIN: UNIQUE DESIGN, LOWER FABRICATION TO REDUCE ENERGY LOSS AND OPTIMIZE OPERATION COST



>>> Technical data

	0		H		<u></u>		••	<u>•</u>	Ø	M
Model	Pressure		Motor		Capacity*		Noise	Weight	Connection	Dimension
	Mpa	psig	kW	hp	l/s	cfm	dB(A)±2	KG	G	LxWxH (mm)
CSMV60	0.7-1.0	100-145	45	60	28-142	60-300	74	750	1 1/2	1723x980x1600
CSMV75	0.7-1.0	100-145	55	75	30-183	63-388	76	920	2	1920x1060x1600
CSMV100	0.7-1.0	100-145	75	100	43-218	92-462	78	980	2	1920X1060X1600

	Pressure		Motor		Eapacity*		••	<u> </u>	Ø	M
Model							Noise	Weight	Connection	Dimension
	Mpa	psig	kW	hp	I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
DRD60 PM	0.7-1.3	100-190	45	60	33-145	69-307	71	733	1 1/2	1723x980x1600
DRD75 PM	0.7-1.3	100-190	55	75	27-189	57-401	72	932	2	2210x1060x1600
DRD100 PM	0.7-1.3	100-190	75	100	28-222	59-469	77	973	2	2210x1060x1600

^{*} Unit performance measured according to ISO1217. Annex C. latest edition and ISO 2151.

>>> Features and benefits







Industrial leading efficiency class





REVOLUTIONARY DRIVE TRAIN TECHNOLOGY

Improved energy efficiency saves you money


- » In-house designed iPM motor with iPM Super Premium Efficiency.
- » New generation in-house designed screw elements, with improved efficiency.
- » Integrated direct drive transmission for minimal losses.
- » Smart inlet valve optimizes the inlet flow and improves efficiency.

Increased reliability extends lifetime

- » iPM motor rated IP66, premium protection against dust and water ingress.
- » Globally renowned screw elements, proven in thousands of installations.
- » Optimal cooling at all speeds and conditions thanks to oil-cooling principle of the iPM motor.

Maintenance-free design minimizes downtime and improves your productivity


- » Coupling-free direct drive design, no maintenance needed.
- » Smart inlet valve, no maintenance needed.

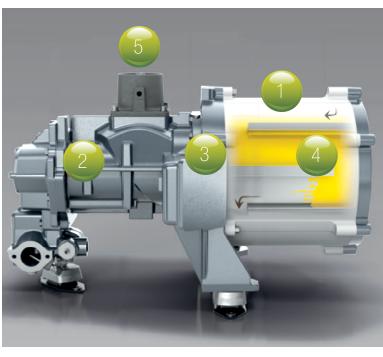

- iPM motor
- 2 In-house designed screw elements
- Oirect drive
- Oil-cooling
 - Smart inlet value

>>> We protect your efficiency

Energy costs represent about 70% of the total operating cost of your compressor over a 5 year period. That's why reducing the operating cost of a compressed air solution is a major focus. Variable frequency driven compressors can cut the energy bill of your compressor by up to 35%.

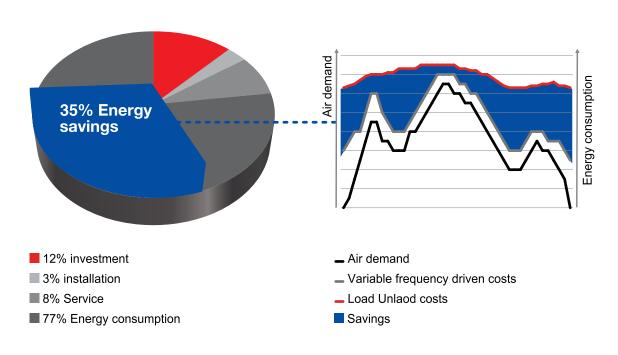

A TOTAL SOLUTION FOR YOUR QUALITY AIR

>>> Complete compressor room solutions



Line Filters

» Purify the compressed air by eliminating oil/dust contaminants resulting in higher final product quality and an increase of your overall productivity.

Air Receiver

» Buffer storage for compressed air. Helps with condensate separation, pressure stabilization and more efficient operation of the compressor.

Oil Water Separator

Captures the oil in compressor condensate so it can be disposed of in an safe and environment-friendly way.

AIRnet

Fast to install, reliable piping system, designed for compressed air applications offers lowest total cost of ownership.

>>> Complete your compressed air installation with an ICONS plan

What if your compressor needs service or an immediate intervention? With an ICONS plan, you get an alert from your controller delivered straight to your computer, tablet or smartphone. Wherever you are, you can take immediate action and reduce the risk of downtime and other costs.



With connectivity



Without connectivity





Oil-injected screw compressor

Fixed speed Range CSM/DRD series

Variable speed Range CSMV & DRD PM series



- A high quality product offering you technology you can trust.
- Our products are easy to use and guarantee high reliability.
- Distributors are always nearby ensuring availability of both products and support.
- Choosing our high performance products entails a partnership that will boost your business.
- Safeguarding long-term productivity through optimal serviceability and use of original parts.



Care. Trust. Efficiency.

Care

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.