



## Quality, Safe, Reliable Professional Compressed Air Purification

**CFD, CDZ, CED & OSD 20 - 710**



# Condensate Removal & Treatment

## Automatic Drains

Model	Inlet	Outlet	Max Pressure	Min Temp	Max Temp	Nominal Discharge	Capacity
CFD 85	1/2"	6mm	16bar	1.5°C	850C	22ml	84L/Hr
CZD 800	1/2"	1/2"	16bar	1.5°C	850C	92ml	800L/Hr

Model	Inlet	Outlet	Max Pressure	Min Temp	Max Temp	Voltage
CED 320	1/2"	6mm	15bar	1.5°C	55°C	230V/1P/50-60Hz
Supply with 1.2 meter lead						



CFD 85



CZD 800




CED 320

## Oil Water Separators

Model	Nominal Flow			Inlet	Outlet	Dimension
	l/min	m3/h	cfm			
OSD 20	2000	120	71	1/4"	10	140x140x240
OSD 35	3500	210	124	1/2"	20	215x257x500
OSD 105	10500	630	371	1/2"	20	345x282x654
OSD 255	25500	1530	901	1/2"	20	432x495x989
OSD 365	36500	2190	1289	1/2"	20	432x495x989
OSD 510	51000	3060	1801	1/2"	20	990x520x989
OSD 710	71000	4260	2507	1/2"	20	990x520x989



## Complete Compressor Room Solutions

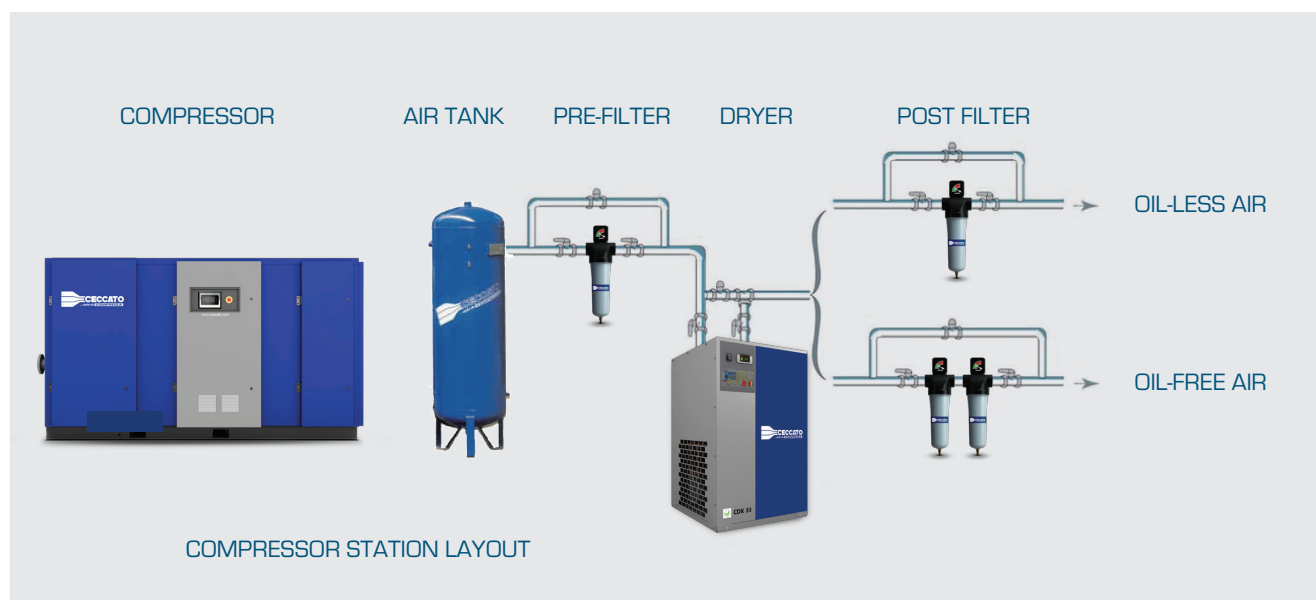






Contact your local representative:

[www.ceccato.com](http://www.ceccato.com)



### CARE

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

### TRUST

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

### EFFICIENCY

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

© 2023, Ceccato. All rights reserved. All mentioned brands, product names, company names, trademarks and service marks are the properties of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications without prior notice. Pictures are not contractually binding.

