

Solid, simple and smart: advanced reliability in compressed air

bstAIR 40 AIR AND NITROGEN BOOSTERS









What do you expect from your booster? How about powerful operation, reliability, efficiency, flexibility, and ease of use? The Ceccato bstAIR 40 checks all these boxes and then some. Use it to power your high-pressure air and nitrogen applications and enjoy a long lifetime of no-hassle performance and operational savings. To meet your specific requirements, the bstAIR 40 comes in two models and two pressure variants, all of which can be tailored with additional equipment and accessories.





A versatile booster

- · Can be used for air and nitrogen applications.
- · Choice between Standard (ST) and Full Feature (FF) models.
 - · 25-bar and 40-bar variants.
 - · Additional equipment and accessories available.



Dependable operation

- · Powerful pump delivers more air using less energy.
 - · Works reliably in tough conditions.
 - · Designed for continuous operation.
- · Exceptional reliability for industrial applications.
 - · Quick and easy maintenance.

Two versions to meet your needs

Standard (ST) Solid booster performance



In-house designed booster pump: more air, less energy

100% duty cycle

Use it for nitrogen

25-bar and 40-bar

Full Feature (FF) The all-in-one package





pressure aftercooler





BOOST YOUR EFFICIENCY

What is a booster?

A booster is a specific type of piston compressor that takes already compressed air and boosts it to reach medium or high pressure. That's because applications such as laser cutting, PET bottle blowing and plastics forming require a higher pressure than a standard air compressor can provide.

Why choose a booster?

There are a number of ways to produce high-pressure air or gas: a compressor and booster, increasing the pressure of your entire plant, and working with an air amplifier or stand-alone high-pressure compressor. A compressor and bstAIR 40 combination is your most cost-efficient solution. In addition, it allows you to use the compressor for your other pneumatic jobs as well.





Easy to run and service

We know you have no time to lose. That is why we designed the bstAIR to be easy to use and service. The ES4000^T controller and its intuitive touchscreen on the FF model offer a host of air system management and monitoring options. Servicing the bstAIR is just as straightforward. Easy access to all mechanical and electrical components ensures swift maintenance with minimal downtime.



Air quality

High air quality - including the reduction of air temperature - is of paramount importance to safeguard the longevity of your pneumatic equipment. The bstAIR 40 FF $\,$ provides this quality air with a high-efficiency aftercooler. Higher levels of purification can be achieved with an optional dryer, line filters and a water separator.







Intuitive control

The ES4000^T controller offers you all the control, monitoring and connectivity features you want and need:

- · Large 4.3" color touchscreen display
- · 30+ languages
- · Warning indications and shutdown alarms
- · Service status and schedule indication
- · Online visualization of running conditions

ICONS

Increased reliability, powered by ICONS

With the Intelligent CONnectivity System (ICONS), you get data and insights from your machines delivered to your computer, tablet or smartphone.

- $\boldsymbol{\cdot}$ Get $\boldsymbol{notified}$ by text or email whenever your machine requires your attention.
- \cdot Control your **maintenance costs** and ensure a longer machine life.
- Increase the **reliability** of your machine by identifying problems before they become a threat to the continuity of your production.









Enhance your air system performance with the ECO6i

Are you operating multiple boosters? Synchronize your machines and increase the reliability of your air supply with the **ECOG**i central controller solution. One single touchscreen display gives you a host of air system management options. This includes narrowing down the operating pressure band for maximum energy savings. You can also equalize the running hours of your boosters to save on maintenance costs.

BUILT FOR HIGH-PRESSURE PERFORMANCE



- 1 In-house designed booster pump ensures higher Free Air Delivery at a lower Specific Energy Requirement.
- 2 IE3 motor with IP55 protection optimizes energy efficiency and reliability.
- 3 New valve system, customized for every model in the range, for better performance with lower power consumption.
- 4 Aftercooler reduces compressed air or nitrogen discharge temperature.

- **5** Oil-level switch stops the unit in case the oil level drops below its minimum level.
- 6 Integrated inlet particle filter reduces risk of machine damage.
- 7 Cubicle with star-delta start lowers current peak during start-up to minimize load on your power network.
- 8 ES4000^T controller (FF) offers automatic monitoring of inlet and discharge pressure and temperature.
- Service parts are strategically placed to allow for quick and easy maintenance.





YOUR AIR AND NITROGEN PARTNER





Technical specifications


bstAIR 40


| Model | Power | | Max. inlet pressure | | Max. discharge pressure | | Free Air Delivery | | Mass ST | Mass FF |
|--------------|-------|------|---------------------|-----|-------------------------|-----|-------------------|-------|---------|---------|
| | HP | kW | bar | psi | bar | psi | l/s | CFM | kg | kg |
| bstAIR 10-40 | 10 | 7.5 | 10 | 145 | 40 | 580 | 34.7 | 73.5 | 310 | 340 |
| bstAIR 10-25 | | | 5 | 72 | 25 | 362 | 25.6 | 54.2 | | |
| bstAIR 15-40 | 15 | 11 | 10 | 145 | 40 | 580 | 48.5 | 102.8 | 350 | 380 |
| bstAIR 15-25 | | | 5 | 72 | 25 | 362 | 37.0 | 78.5 | | |
| bstAIR 20-40 | 20 | 15 | 10 | 145 | 40 | 580 | 63.8 | 135.3 | 360 | 430 |
| bstAIR 20-25 | | | 5 | 72 | 25 | 362 | 48.8 | 103.5 | | |
| bstAIR 25-40 | 25 | 18.5 | 10 | 145 | 40 | 580 | 77.5 | 164.2 | 390 | 460 |
| bstAIR 25-25 | | | 5 | 72 | 25 | 362 | 65.1 | 137.8 | | |
| bstAIR 30-40 | 30 | 22 | 10 | 145 | 40 | 580 | 94.2 | 199.6 | 430 | 500 |
| bstAIR 30-25 | | | 5 | 72 | 25 | 362 | 77.5 | 164.2 | | |
| bstAIR 40-40 | 40 | 30 | 10 | 145 | 40 | 580 | 124.8 | 264.6 | 480 | 550 |
| bstAIR 40-25 | | | 5 | 72 | 25 | 362 | 102.8 | 217.8 | | |

DIMENSIONS

| | Dimensions | | | | | |
|-------------------|------------|-------|--------|--|--|--|
| | Length | Width | Height | | | |
| Standard (ST) | 1533 | 740 | 1044 | | | |
| Full Feature (FF) | 1533 | 751 | 1044 | | | |

PERFORMANCE

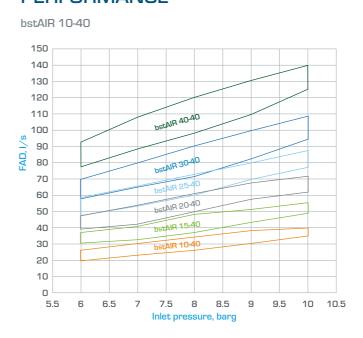





Contact your local representative:

www.ceccato.com



CARE

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

TRUST

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

EFFICIENCY

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

