

Solid, simple and smart: advanced reliability in compressed air

DRM 40 - 60 / DRM 40 - 60 IVR





DRM 40 - 60 DRM 40 - 60 IVR

Your production relies on compressed air, so you know the value of a compressor you can always count on. The DRM was built to be your no-hassle, zero-frustration work floor companion. While typically compressors in this segment are belt-driven, our newest oil-injected rotary screw compressor comes with a direct gear transmission. That means no belts to tension, maintain and replace. The DRM also features an advanced controller with integrated connectivity to easily manage and monitor your compressed air system. The result: reliability, ease-of-use and limited maintenance from the very first moment you commission your new DRM.



1. Simple installation, easy to use

- Plug-and-play installation
- No special foundation required
- Small footprint
- Ready-to-use, integrated dryer
- Intuitive controller



2. Increased productivity, reliable operations

- No downtime for belt tensioning or replacement
- Quiet and smooth gear transmission
- Low noise level
- High-capacity oil/air coolers and perfect air filtration ensure a long lifetime
- Unbeatable performance with heavy-duty IP55 motors



3. Connectivity for performance and reliability

- Remote connectivity, anywhere, any time
- Notifications and shutdown alarms eliminate risk of downtime
- Increased reliability with planned service interventions
- Cost optimization advice



- belt-driven transmissions
 IE3 motor as standard
- Variable Speed version available for 35% energy savings



5. Less maintenance, no-hassle service

- Easy access to service components
- Quick oil level check through front panel gauge
- Service becomes a one-person job
- Service plans tailored to your needs








More value for money

With the DRM, we set out to build the better, more reliable compressor on the market. The compressor offers some major innovations that will you give a lifetime of value and savings.

A highly reliable gear transmission

A belt-driven compressor has a higher risk of downtime and maintenance-related costs. Unscheduled belt tensioning and replacement cause productivity losses and there is always the risk of post-service belt misalignment. That is why the DRM comes with a gear drive transmission. You have no belts to replace and enjoy lower operating (service) costs. What is more, the DRM is 3% more energy efficient compared to belt-driven compressors.



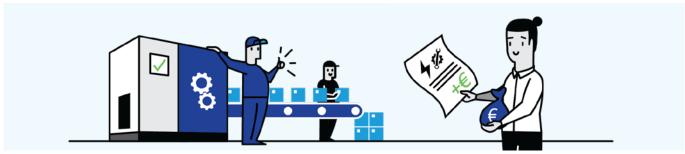



ES4000S controller for optimal performance

The new DRM comes standard equipped with an ES4000S controller that manages and monitors compressor performance. Easy to use, the ES4000S and the optional ES4000T with touch screen give you compressor updates and service alerts before they become a problem.

The integrated **ICONS** connectivity gives you the advanced benefits of remote monitoring and management:

- Remote monitoring that helps you optimize your compressed air system and save energy.
- On-time maintenance to optimize costs and ensure a longer machine life.
- Potential problems are recognized before they can pose a threat to the continuity of your production.


VSD: double digit energy savings

Is your work floor always running at 100%? A traditional compressor is, even when you don't need its full capacity. For most production environments, compressed air use fluctuates during the day or week.

That is why the DRM offers optional variable speed drive technology. A DRM

with VSD matches its air delivery to your actual need. That means it is not using – and wasting – energy when your demand for compressed air is lower.

Ask your Ceccato representative to calculate how much you can save with a DRM VSD. Typically, energy savings run in the double digits!





Line Filters

Eliminate oil and dust from the compressed air to avoid the risk of contamination of your air system and final products.

Air Receiver

Buffer storage for your compressed air helps with condensate separation, pressure stabilization and efficient compressor operation.

Oil-Water Separator

Our oil-water separator captures compressor condensate and separates the oil for safe disposal.


AIRnet

Our easy-to-install piping system distributes your compressed air with maximum efficiency and reliability.

Dryers

You need your compressed air to be dry and clean to protect your pneumatic tools and final products. Ceccato offers a range of reliable, high-performance dryers to meet your air quality requirements and air system specifications.





- 1. Pre-filter
- 2. Oil separator
- 3. Electrical cubicle
- 4. Converter
- 5. Air filter
- 6. Air end
- 7. Motor
- 8. Fan motor
- 9. Gear box
- 10. Dryer
- 11. Oil-sight glass & oil-refill
- 12. Oil-filter

Optional features

Of course, one size does not fit all.

A range of options is available to tailor your DRM to your specific requirements and production environment.

- Oil 8000h
- Coalescence filter option
- Canopy heater
- Water separator drain + automatic drain
- Food grade oil
- Wooden package

- ES4000T controller
- Main isolator switch
- ECO6i central control







Technical specifications

Fixed speed

| | Max. working | Reference | Motor | | Free Air Delivery @ | | | Noise | Cooling | Weight | |
|--------|--------------|---------------------|-------|-----|----------------------|-----|-----|-------|----------|--------|-----|
| | pressure | working pressure | Por | wer | reference conditions | | | Level | Air flow | FM | FMD |
| Model | bar | bar | kw | hp | m³/h | l/s | cfm | dB(A) | m³/h | kg | kg |
| DRM 40 | 7.5 | 7 | 30 | 40 | 320 | 89 | 189 | 71.5 | 4800 | 589 | 707 |
| | 8.5 | 8 | | | 310 | 86 | 182 | | | | |
| | 10 | 9.5 | | | 274 | 76 | 161 | | | | |
| DRM 50 | 7.5 | 7 | 37 | 50 | 396 | 110 | 233 | 73 | 4800 | 610 | 728 |
| | 8.5 | 8 | | | 365 | 102 | 215 | | | | |
| | 10 | 9.5 | | | 342 | 95 | 201 | | | | |
| DRM 60 | 7.5 | 7 | 45 | 60 | 454 | 126 | 267 | 74.5 | 6700 | 629 | 747 |
| | 8.5 | 8 | | | 436 | 121 | 256 | | | | |
| | 10 | 9.5 | | | 400 | 111 | 235 | | | | |

Variable speed

| | | Max. working pressure | Motor Power | | Free Air Delivery @ reference conditions | | | | | | Weight | |
|------------|----------|-----------------------------|----------------|----|--|--------------------|--------------------|--------------------|---------------------|------|--------|-------|
| | | | | | Min.FAD* Max. FAD* | | | Noise Level | Cooling Air flow | FM | FMD | |
| | pressure | | | | 7 bar | 7 bar 8 bar | | 9,5 bar | | | I IVI | I WID |
| Model | bar | bar | kW | hp | m³/h l/s cfm | m³/h l/s cfm | m³/h l/s cfm | m³/h l/s cfm | dB(A) | m³/h | kg | kg |
| DRM 40 IVR | 4 | 10 | 30 | 40 | 85 24 50 | 318 88 187 | 306 85 180 | 274 76 161 | 71.5 | 4800 | 605 | 723 |
| DRM 50 IVR | 4 | 10 | 37 | 50 | 109 30 64 | 401 111 236 | 370 103 218 | 343 95 202 | 73 | 4800 | 626 | 744 |
| DRM 60 IVR | 4 | 10 | 45 | 60 | 110 31 65 | 447 124 263 | 434 121 255 | 404 112 238 | 74.5 | 6700 | 656 | 774 |





Contact your local representative:

www.ceccato.com



CARE

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

TRUST

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

EFFICIENCY

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.



